


## TORONTO

ceiling mounted bioethanol fireplace

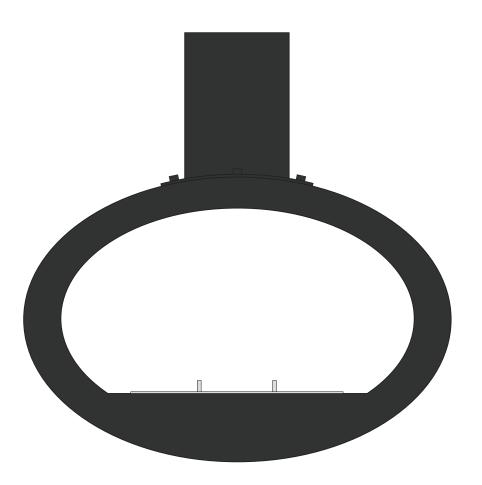


## General Installation Guidelines Installing the Toronto celing mounted bioethanol fireplace is recommended to be a


two person job.


weight of the fireplace.

The fireplace can be mounted to any type of ceiling, as long as the ceiling can carry the

The fireplace should be installed with a safety distance of minimum 1 meter to flammable materials.

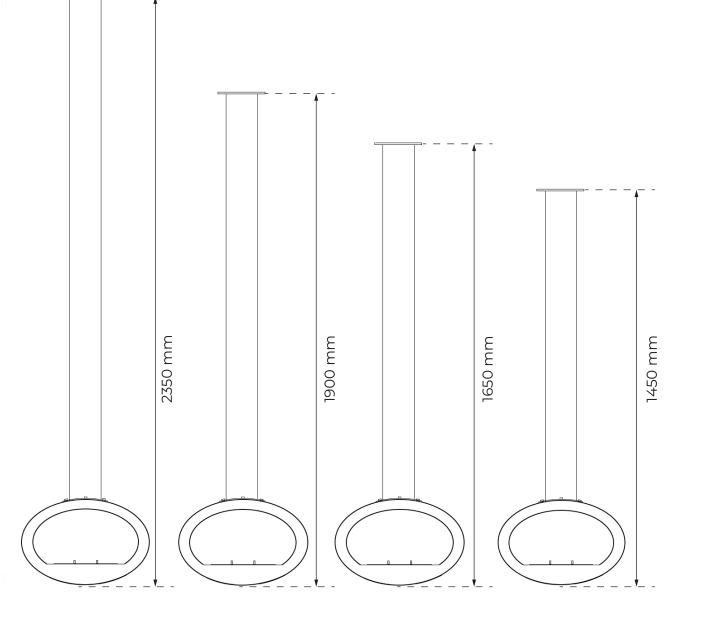


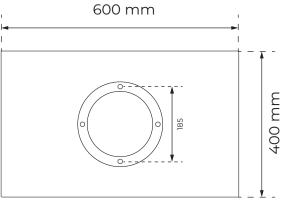

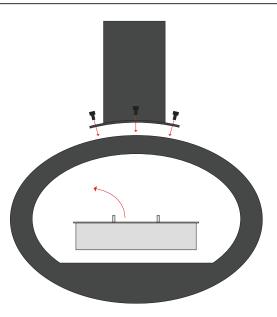


Remove the burner from the fireplace, to avoid damage to the fireplace during installation.

Attach the ceiling rod to the fireplace using the 4 included screws.

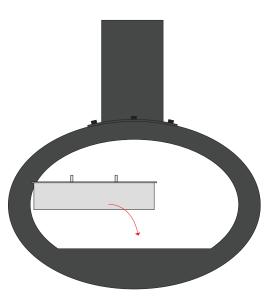

After mounting the fireplace, place the bioethanol burner back into the fireplace.

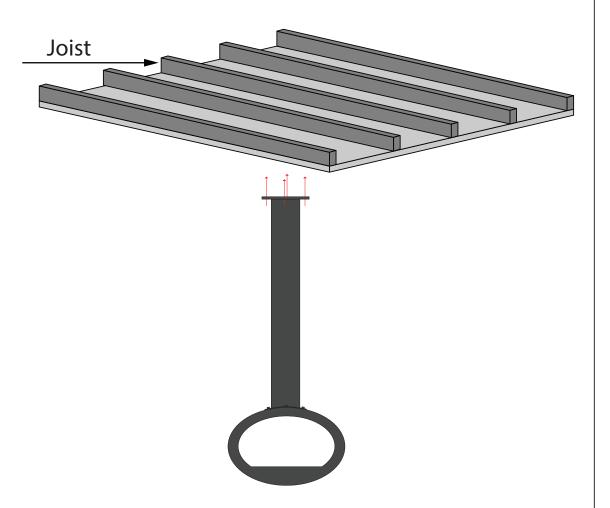

Attach the fireplace to the ceiling, using 4 appropriate screws and plugs, which are compatible with your celing.

On recessed ceilings with plasterboard or similar plates, the fireplace should prefarably be attached to one of the overhead joists behind the ceiling plates to ensure that the ceiling can support the weight of the fireplace.